





WHEELS AT WORK

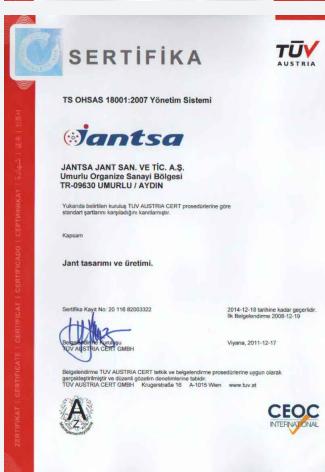

www.jantsa.com

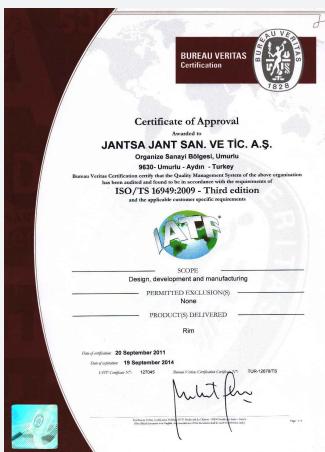

INDEX

- [1 Main Facts / Company Profile](#)
- [2 Jantsa Wheel Size Product Range](#)
- [4 Main Definitions](#)
- [5 Wheel Specifications](#)
- [6 Hole Details](#)
- [7 Wheel Centering Systems](#)
- [8 Safety & Mounting Recommendations](#)
- [9 Tubeless 15° Dc Wheels For Commercial Vehicles](#)
- [14 Demountable Rims](#)
- [15 Implement Wheels](#)
- [20 General Conditions Of Sale](#)
- [21 Multi-Piece Heavy Duty Truck Wheels](#)
- [24 Rim, Ring & Combined Ring Matching](#)
- [27 Agro Industrial & Industrial Vehicle Wheels](#)
- [31 Single Piece Agricultural Wheels](#)
- [35 Tubeless & Tube Type Light Commercial Vehicle Wheels](#)
- [37 Multi-Piece Agricultural Implement Wheels For low Speed Applications](#)
- [40 Warranty Policy](#)

MAIN FACTS

Name	JANTSA JANT SANAYI ve TICARET A.S.
Location	Organize Sanayi Bölgesi, 09630 Umurlu / Aydin / Turkey
Total Manufacturing Area	100.000 M ²
Manufacturing Facilities	<ul style="list-style-type: none">• JANTS A 1 (Main Plant and headquarters - Aydin / Turkey)• JANTS A 2 (Production of lock and side rings - Aydin / Turkey)• JANTS A MAGNETTO joint production (Main Plant for JM wheels Aydin / Turkey)
Annual Production Capacity	1.8 million wheels
Export Markets	More than 80 countries
Share of Export in Total Turnover	Approximately 75%
Technical Cooperation Partners	LBF (Fraunhofer institute), Dokuz Eylul University, BV (Bureau Veritas)
Production Range	<p>Wheels for commercial vehicles (Trucks, Buses, Trailers, etc...)</p> <p>Wheels for industrial machines</p> <p>(Cranes, Loaders, Graders, Excavators, Bulldozers, Forklifts, etc...)</p> <p>Wheels for Agricultural Implements/Machines</p> <p>(Tractors, Foresters, Harvesters, Agricultural Mixers and Trailers, etc...)</p> <p>Wheels for light commercial vehicles (Pick-up Trucks, Minibuses, etc...)</p> <p>Wheels for military vehicles (Armored vehicles, tanks, etc...)</p>

COMPANY PROFILE

JANTS A S., was established in Atca (Turkey) in 1977 & today is Turkey's largest wheel manufacturer, and one of the biggest companies operating in this field in Europe. JANTS A is one of the leading companies in the world in respect of variety of product , shortest production lead times and development of new products.

JANTS A manufacturers over 200 sizes in more than 3000 different models of wheels. Annual production capacity of the company is 1.800.000 wheels, with approximately 75% being exported to over 80 countries all over the world.

Constant evolution of JANTS A is guaranteed by on-going investment in our Production Processes, Quality Control, Research and Development activities and in our Human Resources.

Road safety in many respects is dependent on quality of the wheel. Therefore JANTS A gives top priority to quality assurance of its products at every stage of production. We have a Quality Management System which is implemented throughout our processes. Finished products are regularly tested at independent laboratories, by international quality control organizations and during in-field performance tests by our customers.

JANTS A is able to develop and put new products into production in the shortest time, utilizing a combination of automated and manual production processes supported by our in-house tooling shop. At every step of production the JANTS A team is focused on manufacturing wheels to the highest quality standard whilst maximizing efficiency, respecting the environment & economically using resources.

All production facilities of JANTS A have passed environmental management certification approved by ISO 14001 Standard

The main purpose of JANTS A has always been and will always be to satisfy the expectations and requirements of our customers from all over the world in respect of quality, variety, service and price.

"THINK JANTS A....."

JANTSA WHEEL SIZ

Related Branches and Sizes	8	9	10	12	13	14	15	15,3	15,5	16	16,5	17	17,5	18	19
Tubeless, 15° DC Commercial / Agricultural													17,5		
													5,25		
													6,00		
													6,75		
													8,25		
													10,50		
													14,00		
15° Tubeless Demountable Rims													17,5		
													6,00		
													6,75		
Heavy Duty Tube-Type Demountable Rims													15		
													6,0		
													6,5		
													7,0		
													7,5		
Implement Wheels													15		
Flotation, Harvesty, Forestry, Agricultural													5,00		
													9,00		
													13,00		
													W6		
													6LB		
													W7,5		
													8LB		
													W8		
													10LB		
													W10		
													13LB		
Multi-Piece Heavy Duty Truck Wheels													15		
													6,0		
													6,5		
													7,0		
													7,5		
Industrial Vehicle Wheels													15		
	8	9	10	12									15		
	3,00D	4,00E	5,00F	5,00S									6,0		
	4,33R	6,00E	5,50F	8,00G									6,5		
			6,50F										8,0		
													9,75		
													10,5		
Single Piece Tractor&Agricultural Wheels													12		
													15		
													7,00		
													4,00		
													6		
													8		
													10		
													13		
													3D		
Tubeless & Tubetype Light Commercial Vehicle Wheels													13		
													14		
													5,50		
													4,50		
													4,5J		
													5,5J		
													6J		
Multi-Piece Agricultural Implement Wheels for Low Speed Applications													15		
													6,00		
													5,50		
													6,50		
													6,00		
													6,50		
													13		

PRODUCT RANGE

19,5	20	20,25	20,5	22	22,5	23	24	24,5	25	26	26,5	28	30	30,5	32	34	36	38	42	44
------	----	-------	------	----	------	----	----	------	----	----	------	----	----	------	----	----	----	----	----	----

19,5		22,5		24,5	4
6,00		6,75		8,25	
6,75		7,50			
7,50		8,25			
8,25		9,00			
11,75		9,75			
13,00		11,75			
14,00		12,25			
		13,00			
		14,00			
		15,00			

		22,5		24,5	3
		7,5		8,25	
		8,25			
		9,00			
		11,75			

	20		24	3
	6,5		8,0	
	7,0		8,5	
	7,5			
	8,0			
	8,5			

19,5	20	20,25	20,5		22,5	23	24	24,5		26	26,5		30	30,5	32		38	42	22
7,50	W9	14,00	14,00		16,00	19,00	DW16L	8,25		DW20B	20,00		DW18L	20,00	DW21		DH14	DH23	
8,25	W11		16,00		20,00		DW18L	13,00		DW25B	24,00			24,00	DW27		DH23	DH28	
11,75	W13		18,00		24,00						28,00			28,00	DW36		DH25		
13,00	W14																DH28		
14,00	14,00																		

	20		22		24	4
	6,0		8,0		8,0	
	6,5				8,5	
	7,0					
	7,5					
	8,0					
	8,5					
	9,0					
	10,00					
	10,00V					
	10,00W					
	11,00					
	11,00V					

	20		24	24,5	25	26	28		38	13
	8,0		8,0	11,75	9,50	17,00	W15L	W14L		14
	8,5		8,5	13,00	10,00	19,50	W16L	W15L		
	8,5V		9,00		11,25	22,00				
	10,00V		10,00		12,00	25,00				
	11,00		W13		12					
			DW13		13					
			DW14L		13,00					
			W15L		14,00					

	20		24		28	30	32	34	36	38	42	44	48	52	17
	5,50		W7		W9	DW12	W8	W15L	W9	DW10	W8	W8	W8	W8	
	W8		W8		W10	W13			W11	DW11					
	W10		W10		W11	W14L			W12	DW12					
			W12		W12	DW14L			W13	DW15L					
			W13		W14				W14						
			W14		W15L										

	20	5
	5,50	

	20	4
	5,50	
	6,00	
	6,50	
	7,00	
	10	
	11	
	13	

MAIN DEFINITIONS

Terms Rim, Disc and Wheel are often confused in daily life. In order to omit confusion it is important to understand difference between those definitions.

Wheel is a rotating component of the vehicle, which carries load of the vehicle and passes the torque. Wheel is located between tire and hub. Most of Steel Wheels manufactured by JANTSA consist of rim and disc assembled together.

Rim is a part of the wheel which serves as seat for the tire. According to standard JANTSA practice, all rim sizes are given in inches. Rims can be classified in two groups: multi-piece and single-piece rims.

Single-piece rims have one-piece rim design.

Multi-piece rims consist of rim itself and rings mounted on the rim.

The type of rim can be easily identified in JANTSA catalogue by sign between measuring dimensions in inches:
"x" – for single-piece rims (22.5x11.75, 9.00x15.3 etc.)
"–" – for multi-piece rims (8.5-20, 17.00-25/1.7 etc.)


Disc serves as a connection part between wheel and hub (break drum/disc break) of the vehicle and is either welded or connected with bolts to the rim.

JANTSA is also manufacturing **Demountable rims** (discless wheels / spoke wheels) with adapter ring, spokes and clamps serving as a connection part of rim to the hub.

Single-piece disc wheel



Multi-piece disc wheel

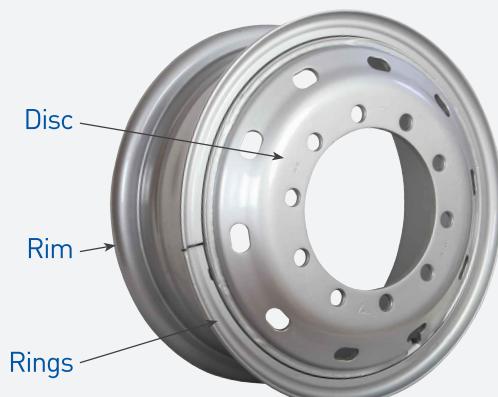


Demountable rim




WHEEL SPECIFICATIONS

1	Width of rim
2	Diameter of rim
3	Thickness of rim material
4	Thickness of disc material
5	Center hole diameter
6	PCD (Pitch Circle Diameter)
7	Bolt hole diameter
8	Offset
9	Offset ET (Inset)
10	Valve Hole Diameter
11	Ventilation Hole Diameter
12	Diameter of countersink (for spherical)

SIDE VIEW

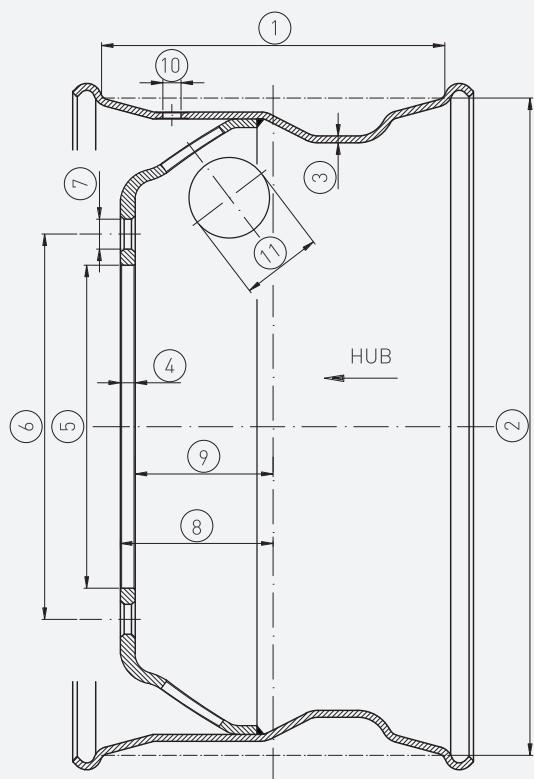

FRONT VIEW

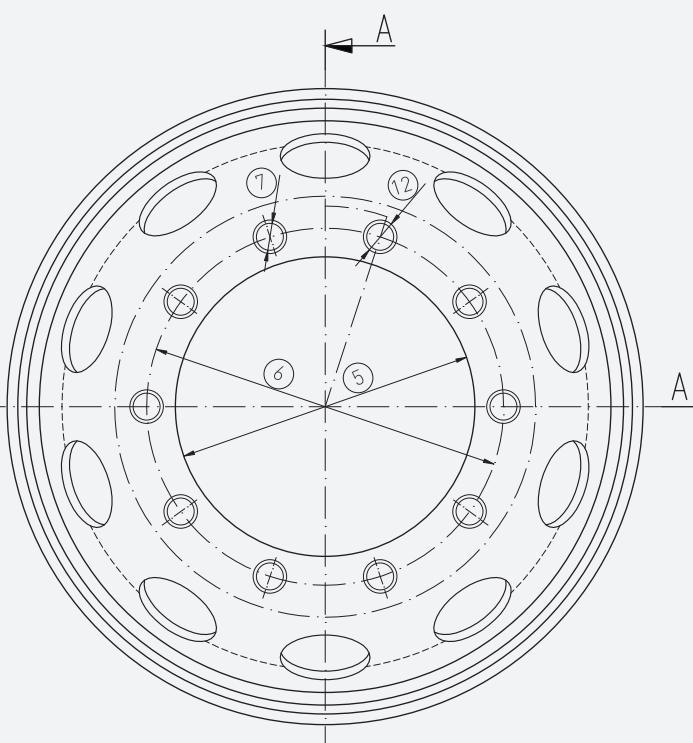

HOLE DETAILS

SPHERICAL COUNTERSINK

Jantsa Standart	d2	d3	r	According to EUWA
1	18,5	24	14	B14 DS 28/B14 ES 28
2	21,5	27	16	B18 DS 32/B18 ES 32
3	27	32	18	B22 DS 36/B22 ES 36
4	20,5	25	14	
5	32,15	37	22,2	B19 DS 44,4/B19 ES 44,4
6	14	-	14	
7	15,5	-	14	
8	18,5	-	14	
9	20	-	14	
10	21	-	14	
11	20	-	12	
12	16	20	12	
26	15	20	13	
31	37	43	25	
33	26	32	18	M22 DS 36/M22 ES 36
34	29	34	22	

CONICAL COUNTERSINK

Jantsa Standart	d2	d3	α	According to EUWA
13	14	19,8	60°	
14	16	19,8	60°	
15	16	22	90°	
16	14,2	-	60°	
17	25,4	31,5	80°	B23 DC 80/B23 EC 80
18	18,5	-	60°	
19	16,8	-	60°	
20	28,6	36	90°	
21	21,5	27	90°	
22	12	-	80°	
23	-	17	60°	
24	13	16	90°	
25	10,5	-	60°	
37	26	31,5	80°	
38	16,3	-	90°	M23 DS 80/M23 ES 80

EUWA STUD HOLE CODE

M | 22 | I | S | 24 | 60

SPHERICAL / CONICAL STUD HOLE

Diameter Angle


Spherical Conical

Inside External Double Side


Stud Diameter

M Hub Centring
B Blot Centring


COUNTERSINK TYPE



STRAIGHT
Hub Piloted

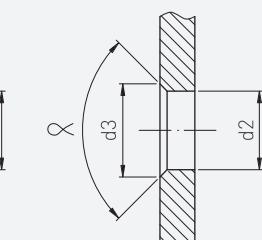

CONICAL
Stud Piloted




SPHERICAL
Stud Piloted

BOLT HOLE TYPE



A Type




B Type



E Type

WHEEL CENTERING SYSTEMS

STUD CENTERED WHEEL

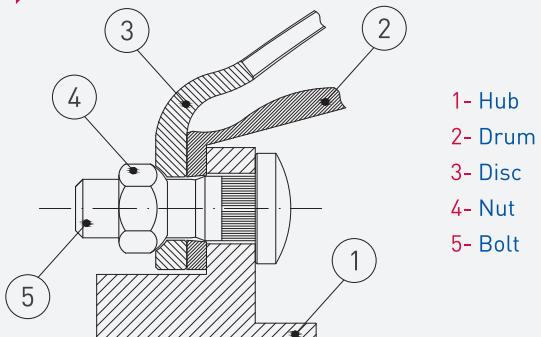


- 1- Hub
- 2- Drum
- 3- Disc
- 4- Nut
- 5- Bolt

The common types of mounting systems are Stud piloted, Hub piloted and Double piloted.

Stud centered system uses the studs on the wheel hub to guide and center the wheel. Chamfered bolt holes identify a stud centered wheel. These wheels are designed to be centered by conical or spherical nuts on the studs.

Hub centered systems use the actual wheel hub to guide and center the wheel. Hub centered wheels generally have straight bolt holes with no ball seat for nuts with flat washer (flange nuts). This feature provides a visual way of hub piloted wheels. These wheels require narrow tolerance of center hole dimensions.

HUB CENTERED WHEEL

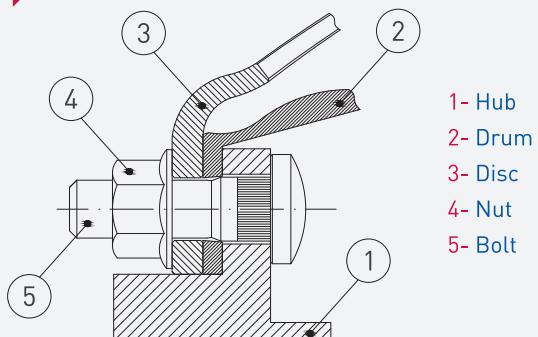


- 1- Hub
- 2- Drum
- 3- Disc
- 4- Nut
- 5- Bolt

Double centered mounting systems use both wheel hub and studs to guide and center the wheel. These wheels have bolt holes with countersinks together with center hole with a narrow tolerance. They mostly use spherical or conical nuts, but flange nuts like for hub-centered wheels can be also used.

It is imperative to use right components for each type of mounting and to fit wheels to the proper hubs. Mixing components of different mounting systems can lead to breaking of studs, decrease of torque, cracks on wheels and eventually wheel slippage.

OFFSET

One of the most important dimensions of the disc wheel is **Offset**. As per JANTSA classification offset is a dimension from imaginary rim center line to outer disc surface. Disc wheel offset can be positive, negative or so-called "0-offset", please see pictures below for explanations.

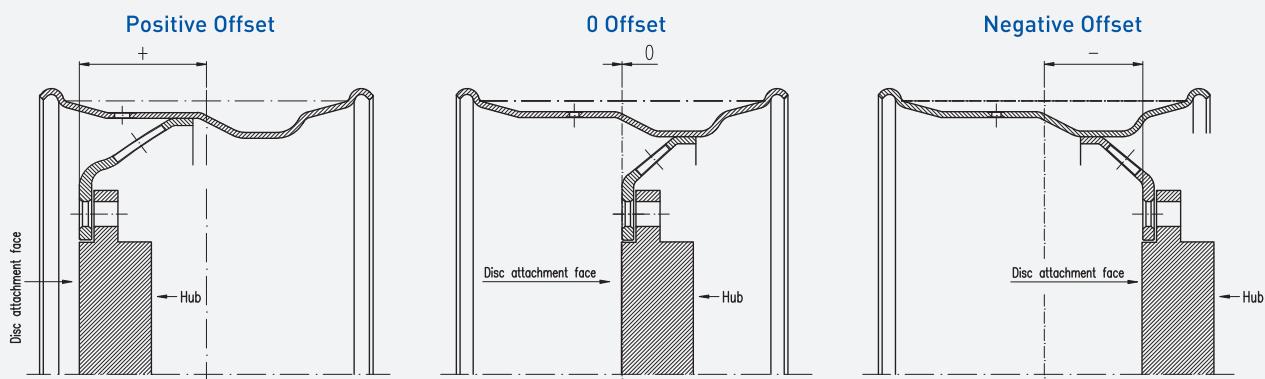

For dual mounting applications Offset equals to "half dual spacing". Dual spacing is a distance between imaginary center lines of two rims in dual mounting. Values of tire clearance, overall vehicle width of tires, vehicle clearance and in some cases overall vehicle width are determined by value of dual spacing. Therefore, values of minimum dual spacing are regulated by a number of standards, including ETRTO and TR&A. Another measurement, commonly used by many manufacturers is **Offset ET** (from German "Einpresstiefe" or so-called "inset") which is a dimension from imaginary rim center line to inner disc attachment surface. Difference between value of Offset and Offset ET equals disc thickness of the wheel.

SAFETY & MOUNTING RECOMMENDATIONS

It is important to handle wheels with maximum care, and pay special attention to its safe usage, **mounting**, **demounting** and **service**. Users have to follow all conditions and norms according to industry, national and international regulations. As JANTSA we will try to point out just those which we consider as the most common and important.

Before servicing, disc wheels have to be checked for following **possible damages**:

- Cracks on the disc and/or rim
- Asymmetric shape of disc contact surface
- Deformed (damage, burr, excessive corrosion etc) stud holes
- Deformed (damage, burr, excessive corrosion etc) flanges
- Excessive corrosion
- Excessive wear
- Damaged rings of multi-piece wheels

Using wheels/components under these conditions is strictly forbidden. Damaged parts should be replaced.

While **mounting the wheel on a hub** you have to ensure that all surfaces are clean, free from rust and deposits. Elements of different mounting types should not be confused, since this may result in loss of torque, disc surface cracks, bolts and studs damage, and loss of wheel. Applied torque level should correspond to instructions of vehicle manufacturer. Nuts installation has to be done crosswise, with gradual increase of torque level. Tightening of nuts on the wheel has to be checked 100 km after first installation and regularly during usage.


Mounting and Demounting of tire on the wheel has to be done by qualified personnel in well-equipped service points, according to specifications and procedures stipulated by ETRTO, TRA and other industry, national and international regulations. You have to ensure that all surfaces are clean, free from rust and deposits. It is crucial to match properly wheel and tire sizes according to above mentioned standards and recommendations of the vehicle manufacturer. Mismatch can result in serious damages and injuries. Diameter shown on the tire should exactly match the diameter stamped on the rim/wheel. Tires must be completely deflated before demounting wheel, or components of the wheel from the vehicle. Avoid standing in front of multi-piece wheels during assembly: damaged components might spring off.

Mixing components of various manufactures may result in fatal injuries, therefore only matching parts of one manufacturer and one wheel system can be assembled.

Repair or of steel wheels is strictly prohibited.

Especially dangerous is:

- Welding of rims or wheels
- Repair of damaged stud holes
- Repair of deformed center hole
- Straightening of disc contact surface
- Straightening of rim flanges

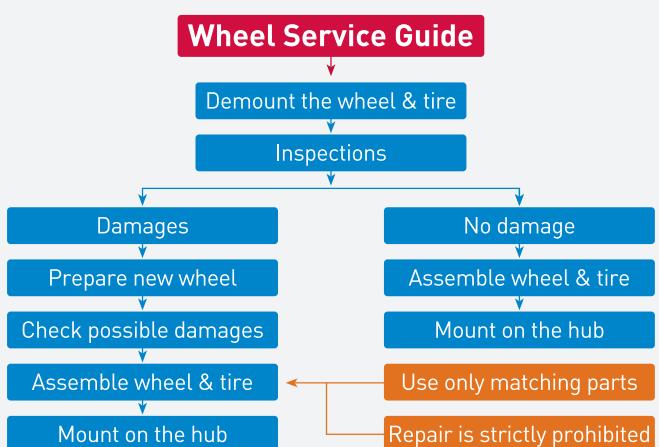

JANTSA does not bear obligation under warranty for goods if they were modified, repaired or processed. This instructions should be used only as a guide and can not be the only source of information of safety information on wheels.

www.jantsa.com

TUBELESS 15° DC WHEELS
TICARI JANTLAR



TUBELESS 15°
DC WHEELS FOR
COMMERCIAL
VEHICLES

Ticari Araçlar İçin
15° Eğimli Tubeless
Jantlar



TUBELESS 15° DC WHEELS FOR COMMERCIAL VEHICLES

TİCARİ ARAÇLAR İÇİN 15° EĞİMLİ TUBELESS JANTLAR



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATI	TIRE SIZE LASTİK EBATI	JANTS A PART NUMBER JANTS A KOD	CENTER HOLE (mm) PÖRYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TIPI (mm)	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFSET (mm)	LOAD CAPACITY @ TAŞIMA KAPASİTESİ 100 Km/h
17.5"	17.5x5.25	7 R 17.5	525100	161	205	B2	6	124	1600
			525104	161	205	A2	6	0	1600
			525108	150	208	B5	5	115	1300
			525110	176	225	B33	10	116	1850
			525111	146	203.2	Ø29mm B34	5	115	1300
	17.5x6.00	8R17.5	600100	161	205	B17	6	130	1900
			600101	176	225	B33	10	133	2100
		8.5R17.5	600102	146	203.2	B34	5	127	1750
	215/75 R 17.5	9 R17.5	600103	161	205	B2	6	127	1900
			600107	150	208	B5	5	128	1800
		215/75 R 17.5	600108	164	222.25	B3	6	128	2300
			600119	146	203.2	B5	5	115	2100
	225/75 R 17.5	215/75 R 17.5	600124	164	222.25	B5	6	135	2300
			600136	146	203.2	B5	5	115	2150
		225/75 R 17.5	600137	150	208	B5	5	115	2200
			600174	221	275	Ø24mm	8	134	2200
17.5x6.75	9R17.5	675100	161	205	B2	6	145	2000	
		9.5 R17.5	675101	176	225	B3	10	145	2725
		675102	176	225	B33	10	145	2725	
		10 R 17.5	675109	202	245.2	Ø21.5mm	6	140	2150
	215/75 R 17.5	10 R 17.5	675116	164	222.25	B5	6	135	2450
			675128	161	205	A2	6	0	2725
		225/75 R 17.5	675135	203.2	241.3	16.5	9	28,5	2000
			675151	176	225	Ø26mm	10	145	2725
	235/75 R 17.5	225/75 R 17.5	675158	min 120.95/ max 121.1	165.1	Ø17.4	8	inset 4.8	2650
			675181		165.1	222.25	Ø31.7mm Ø37.7mm	10	157
		235/75 R 17.5	675703	221	275	Ø27	8	142	2550

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

TUBELESS 15° DC WHEELS FOR COMMERCIAL VEHICLES

TİCARİ ARAÇLAR İÇİN 15° EĞİMLİ TUBELESS JANTLAR



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATI	TIRE SIZE LASTİK EBATI	JANTSА PART NUMBER JANTSА KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TIPI (mm)	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFSET (mm)	LOAD CAPACITY@ TAŞIMA KAPASITESİ 100 Km/h
19.5"	19.5x6.00	8.00 R 19.5	600191	153.2	203.2	Ø32.5/37/R22	5	135	1800
			600196	125.1	170	A5	8	94	1800
			600199	127	165.1	Ø16.6/Ø23.3	8	106.5	1800
	19.5x6.75	9.5 R 19.5	675189	221	275	B3	8	145	2500
		10 R 19.5	675191	164	222.25	B5	6	145	2400
		245/70 R 19.5	675197	176	225	B33	10	145	2600
		245/70 R 19.5	675503	125.1	170	Ø16.2	8	0	2250
		245/70 R 19.5	675504	221	275	Ø24mm	8	145	2250
	19.5x7.50	9.5 R 19.5	750190	176	225	Ø26mm	10	150	2800
		10 R 19.5	750193	221	275	B2	8	156	2650
		245/70 R 19.5	750198	164	222.25	B5	6	155	2550
		265/70 R 19.5	750329	161	205	B2	6	156	2550
		265/70 R 19.5	750337	220	285.75	Ø26	10	156	2600
		11 R 19.5	750338	221	275	B17	8	156	2600
		11 R 19.5	750362	220	285.75	Ø26	10	162.5	3050
		285/70 R 19.5	825102	176	225	Ø26mm	10	164	3100
		285/70 R 19.5	825111	221	275	Ø24mm	8	164	3000
		15 R 19.5	111950	221	275	Ø26mm	8	0	4250
		15 R 19.5	111958	281	335	Ø26	10	0	4300
19.5x11.75	19.5x13.00	425/65 R 19.5	131952	281	335	Ø26	10	63	4400
		425/65 R 19.5	131953	221	275	A3	8	0	4300
		425/65 R 19.5	141950	221	275	Ø24mm	8	0	4500
	19.5x14.00	445/65 R 19.5	141952	281	335	B3	10	0	4650
		445/65 R 19.5	141958	281	335	B33	10	0	4500
		445/65 R 19.5	141977	221	275	Ø26mm	8	0	4600

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

TUBELESS 15° DC WHEELS FOR COMMERCIAL VEHICLES

TİCARİ ARAÇLAR İÇİN 15° EĞİMLİ TUBELESS JANTLAR



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATı	TIRE SIZE LASTIK EBATı	JANTSA PART NUMBER JANTSA KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TIPI (mm)	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFSET (mm)	LOAD CAPACITY @ TAŞIMA KAPASİTESİ 100 Km/h
22.5"	22.5x7.50	10R22.5	750201	221	275	A2	8	0	3250
			750202	161	205	A2	6	0	3100
		11R22.5	750203	281	335	B3	10	153	3400
			750204	221	275	B2	8	153	3300
		275/80R22.5	750206	281	335	Ø26mm	10	153	3400
			750222	220	285.75	Ø26mm	10	163.5	3000
			750240	221	275	B17	8	153	3300
		275/70R22.5	750243	165.1	222.25	Ø19.8mm	6	0	2900
			825201	281	335	B3	10	165	3550
	22.5x8.25	11R22.5	825202	281	335	Ø26mm	10	165	3550
			825206	281	335	Ø26mm	10	0	3600
		12R22.5	825208	221	275	B17	8	0	3500
			825213	221	285	B5	8	163	3650
		275/80R22.5	825231	221	285.75	B5	10	165	3360
			825252	221.6	285.75	B5	10	168	3400
		315/70R22.5	825272	220	285.75	Ø26mm	10	168	3400
			825273	281	335	Ø26mm	10	171.5	3750
		295/70R22.5	825279	220	285.75	Ø26mm	10	168	3360
			900249	281	335	Ø26mm	10	175	4000
	22.5x9.00	13R22.5	900250	281	335	B3	10	175	4000
			900255	221	285	B5	8	175	4000
		295/70R22.5	900229	220	285.75	Ø26	10	178	4090
			900251	221.5	285.75	B5	10	178	4000
		315/75R22.5	900275	220	285.75	Ø28.5	10	inset 133.5	4550
			900295	220	285.75	Ø26	10	178	4550

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

TUBELESS 15° DC WHEELS FOR COMMERCIAL VEHICLES

TİCARİ ARAÇLAR İÇİN 15° EĞİMLİ TUBELESS JANTLAR



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATI	TIRE SIZE LASTIK EBATI	JANTSА PART NUMBER JANTSА KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TIPI (mm)	NUMBER OF BOLT HOLES BİJON SAYISI	OFFSET OFSET (mm)	LOAD CAPACITY @ TAŞIMA KAPASİTESİ 100 Km/h
22.5"	22.5x9.75	13R22.5	975201	281	335	Ø26mm	10	180	4250
			975202	281	335	B3	10	180	4250
	22.5x11.75	15R22.5	117599	281	335	Ø26mm	10	Inset135	4500
			117665	281	335	Ø26mm	10	Inset120	4500
	22.5x12.25	365/70R22.5	117667	281	335	Ø26mm	10	0	4500
			117668	281	335	Ø26mm	10	Inset50	4500
	22.5x13.00	385/65R22.5	122502	291	335	A-Ø21/Ø36.8	5	41	4800
			122513	220	285.75	Ø26mm	10	0	5180
			122517	221.5	285.75	A5	10	Inset101.5	5180
			122518	221.5	285.75	A5	10	Inset120.5	5180
	22.5x14.00	16.5R22.5 465/65R22.5	130207	281	335	Ø26mm	10	0	5150
			130257	220	285.75	Ø26	10	Inset133.5	5200
			130258	220	285.75	Ø26	10	16	5200
			130263	281	335	B33	10	0	5150
	22.5x15.00	18R22.5 465/65R22.5	140203	281	335	B33	10	0	5600
			140206	281	335	Ø26mm	10	0	5600
			140248	220	285.75	Ø26mm	10	Negative 51	5750
			140253	281	335	B3	10	90	5600
			140254	281	335	B3	10	120	5600
24.5"	24.5X8.25	12R24.5	150201	281	335	Ø26mm	10	Inset120mm	5750
			150202	281	335	Ø26mm	10	0	5500
			245827	220	285.75	Ø26mm	10	168 ⁻²	3700
			245828	221.5	285.75	A5	10	168 ⁻²	3320
			245829	223.9	285.75	B5	10	168 ⁻²	3700
			245832	220	285.75	Ø26mm	10	168 ⁻²	3320

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

TUBELESS 15° DEMOUNTABLE RIMS

TİCARİ ARAÇLAR İÇİN 15° EĞİMLİ TUBELESS JANTLAR



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM SIZE JANT ÇAPı	JANTS A PART NUMBER JANTS KOD	RIM OFFSET (mm) OFSET	RECOMMENDED VALVE
17.5x6.00	600900	93	TR572
6.75X17.5	675900	100	TR572
22.5X7.50	750900	115	V3.14.3
	825900	120	V3.14.3
22.5X8.25	825901	107	TR573
	825902	120	TR573
22.5X9.00	900900	120	V3.14.3
	900901	127	TR574



MULTI-PIECE TYPE DEMOUNTABLE RIMS

AĞIR VASITA MONTAJ PARÇALARI

RIM SIZE JANT ÇAPı	JANTS A PART NUMBER JANTS KOD	TIRE SIZE LASTIK EBADI
6.0-15	0250	750-15
6.5-15	0252	825-15
7.0-15	0254	900-15
7.5-15	0256	1000-15
6.5-20	01207	825-20
7.0-20	0257	900-20
7.5-20	0775	1000-20
8.0-20	0468	1100-20
8.0-22	01243	1100-22
8.5-20	0794	1200-20
8.0-24	0467	1100-24
8.5-24	0516	1200-24



www.jantsa.com

IMPLEMENT WHEELS
ÖZEL EKİPMAN

jantsa

IMPLEMENT WHEELS
FLOTATION
HARVESTY
FORESTRY
AGRICULTURAL

Özel Ekipman Jantları
Geniş Taban
Biber Döver
Ormanlık Arazi
Tarımsal



IMPLEMENT WHEELS FLOTATION / HARVESTY / FORESTRY / AGRICULTURAL

ÖZEL EKİPMAN JANTLARI GENİŞ TABAN / BİÇER DÖVER / ORMANLIK ARAZİ / TARIMSAL



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATI	TIRE SIZE LASTIK EBATI	JANTS A PART NUMBER JANTS A KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TIPI (mm)	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFSET (mm)
15"	6LBx15	7.00-15	15600	114.3	152.4	B-ø15/18.5/90°	6	40
		7.50-15TR	15601	190.85	241.3	A-17.5/23.8/90°	8	6.5
	8LBx15	225/70R15	15800	79.5	114.3	A-ø13.5/18.5/60°	5	0
			15801	115	165	A-ø18.5/25/80°	5	0
		235/70R15	15802	117.5	152.4	ø17.5mm	6	Negative 21.5
	10LBx15	29x12.5 - 15	10150	90	150	ø15.5mm	6	Negative 42
			10151	94	140	ø15mm	5	Negative 25
		29x13.5 - 15	10154	93.5	140	ø17.5mm	10	Inset 51
		13LBx15	13150	93.1	140	ø15.8mm	10	Inset 30
			13152	201.6	241.3	A-ø17.5/22/90°	9	Inset 50.5
			13155	117.4	152.4	A-ø15/20/90°	6	Negative 6.5
			13157	123.5	165.1	A-ø17.5/25.4/82°	8	0
15.3"	9.00X15.3	10.0/11.5 - 15.3	91531	94	140	A1	5	0
		10.0/75 - 15.3	91535	161	205	A2	6	0
		12.5/80 - 15.3	91548	90	125	ø16mm	5	15
	13x15.5	400/60-15.5	130155	161	205	A2	6	0
			130156	161	205	A2	6	Negative 35
16"	W6x16	215/65 - 16	16600	142.9	184.1	A-ø18/25.4/90°	6	21.5
			16603	142	184.1	ø17/25.4/90°	6	21.8
		16604	90	150	ø15.5	6	Inset 49	
	W7.5x16	230/80 - 16	16752	152.4	203.2	ø17.2/21.5/R14	8	55
	W8x16	10.5/65 - 16	16807	110	160	A1	5	0
			16811	84	130	A1	5	25
		230/80 - 16	16819	161	205	A2	6	0
	W10x16	11.00-16SL	16010	117.7	152.4	B	6	28.5
	13x17	15.0/55-17	130170	161	205	A2	6	0
	16x17	19/45-17 48.0/45-17	160170	161	205	A2	6	0

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATI	TIRE SIZE LASTİK EBATI	JANTSА PART NUMBER JANTSА KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TİPİ (mm)	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFFSET (mm)
17.5"	17.5x6.75	9 R 17.5	675108	161	205	A2	6	0
		9.5 R 17.5	675139	221	275	B2	8	141
		10 R 17.5	675142	161	205	A2	6	0
		215/75 R 17.5	675143	161	205	B2	6	145
		225/75 R 17.5	675162	121.3	165.1	ø17.4	8	0
		235/75 R 17.5	675708	221	275	A2	8	0
	17.5x10.5	14 R 17.5	105175	273	314.3	<small>ø17.4mm ø21.6mm r=90°</small>	8	0
			105177	202	241.3		9	26.5
			105178	221	275		8	0
18"	9x18	10.5/80-18	18934	221	275	A2	8	0
		12.5/80-18	18935	161	205	A2	6	0
			18945	221	275	ø21.5	8	60
	11x18	13.0/65-18	11189	221	275	A2	8	0
			11190	161	205	A2	6	0
			11304	291	335	<small>ø21.5mm ø35.5mm r=22.4</small>	5	42
	13x18	15.5/70R18	13183	161	205	A2	6	0
		405/70R18	13190	221	275	A2	8	0
19.5"	19.5X7.50	9.5 R 19.5	750194	161	205	A2	6	0
		10 R 19.5						
		10 R 19.5	750195	221	275	A2	8	0
		245/70 R 19.5						
	19.5x8.25	265/70 R 19.5	750301	161	205	A2	6	0
		11 R 19.5						
		285/70 R 19.5	825100	161	205	A2	6	0
	19.5x11.75		825101	221	275	A2	8	0
		15 R 19.5	111953	161	205	A2	6	0
	19.5x13.00		111954	221	275	A2	8	0
		425/65 R 19.5	131961	221	275	A2	8	0
			131962	161	205	A2	6	0
20"	19.5x14.00		141956	161	205	A2	6	0
		445/65 R 19.5	141957	221	275	A2	8	0
			141986	176	225	A3	10	0
	9x20	300/70R20	92014	221	275	A2	8	0
		13/80R20	92026	161	205	A2	6	0
	11x20	340/80R20	20124	281	335	B3	10	0
		375/75R20	20126	161	205	A2	6	78
		335/80R20	20314	221	275	B3	8	0
		365/80R20						
20"	13x20	420/65R20	20140	290.5	335	<small>ø21.5/ø38/r22.4</small>	5	35
		420/75R20	20142	281	335		10	0
		425/75R20	20143	221	275		8	0
	14x20	16/70-20	14213	221	275	A2	8	0
		440/65R20	14215	161	205	A2	6	0

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

IMPLEMENT WHEELS FLOTATION / HARVESTY / FORESTRY / AGRICULTURAL

ÖZEL EKİPMAN JANTLARI GENİŞ TABAN / BİÇER DÖVER / ORMANLIK ARAZİ / TARIMSAL



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATI	TIRE SIZE LASTIK EBATI	JANTS A PART NUMBER JANTS A KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TIPİ (mm)	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFSET (mm)
20.5"	20.5x14.00	465/65R20.5	205145	221	275	A2	8	0
			205146	281	335	A3	10	0
	20.5x16.00	525/65R20.5	205160	281	335	ø26	10	Inset 70
	20.5x18.00	24R20.5	205180	281	335	B33	10	Inset 0
22.5"	22.5X7.50	275/80 R 22.5	750201	221	275	A2	8	0
		11 R 22.5	750202	161	205	A2	6	0
		275/80R22.5	825204	161	205	A2	6	0
		295/80R22.5	825205	221	275	A2	8	0
	22.5x8.25	315/70R22.5	825224	152.4	203.2	17/23/90°	8	0
		12R22.5	900211	161	205	A2	6	0
		13R22.5	900212	221	275	A2	8	0
		295/80R22.5	900234	281	335	A3	10	0
	22.5x11.75	15R22.5	117559	281	335	B3	10	0
		365/70R22.5	117560	221	275	A2	8	0
		385/65R22.5	117561	161	205	A2	6	0
		385/65R22.5	117579	221	275	A3	8	0
	22.5x13.00	16.5R22.5	130224	221	275	A2	8	0
		425/65R22.5	130229	161	205	B2	6	0
			130245	281	335	A3	10	0
		18R22.5	140216	221	275	A2	8	0
	22.5x14.00	465/65R22.5	140219	281	335	A3	10	0
			162295	281	335	A3	10	0
		550/60-22.5	162321	281	335	B3	10	50
		500/45-22.5	162328	161	205	A2	6	0
	16.00x22.5		162342	281	335	B33	10	0
			162344	221	275	A3	8	Negative 50
		600/55-22.5	200226	281	335	A3	10	0
		650/50R-22.5	200227	281	335	A3	10	Negative 50
	20.00x22.5		200228	221	275	A2	8	Negative 100
			240225	221	275	A2	8	0
		700/50-22.5	240226	281	335	A3	10	0
			240227	281	335	B3	10	Negative 100
			240228	281	335	A3	10	Negative 50

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATı	TIRE SIZE LASTIK EBATı	JANTSА PART NUMBER JANTSА KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TIPI (mm)	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFSET (mm)
23"	19.00x23	30/21.5R-23	190230	281	335	A33	10	0
24"	DW16x24	19.50-24	16024	221	275	A2	8	0
24"	DW18x24	20.50-24	18024	221	275	A2	8	0
24"			18025	221	275	A2	8	Negative 50
26"	DW20Ax26	23.10-26	20260	281	335	A3	10	0
26"		24L-26	20264	221	275	A2	8	Negative 50
26"	DW25Ax26	28L-26	25260	281	335	A3	10	0
26"		30.50L-26	25265	221	275	A2	8	Negative 100
26.5"			200267	221	275	B2	8	Negative 50
26.5"		20.00x26.5	200270	281	335	A3	10	Negative 50
26.5"			200271	281	335	A3	10	0
26.5"			240265	221	275	B2	8	Negative 50
26.5"	24.00x26.5	700/50-26.5	240266	281	335	A3	10	0
26.5"			240267	281	275	B3	10	Negative 50
26.5"			240278	221	275	A2	8	Negative 100
26.5"	28.00x26.5	800/45-26.5	280265	281	335	A2	10	0
26.5"			280275	221	275	B2	8	Negative 100
30"	DW18Lx30	600/70R30	30800	281	335	A3	10	60
30.5"	20.00x30.5	600/55-30.5	200307	221	275	A2	8	50
30.5"		800/60-30.5	200312	281	335	A3	10	0
30.5"			300313	281	335	A3	10	Negative 50
30.5"	24.00x30.5	650/80-30.5	240305	221	275	A2	8	100
30.5"		700/50-30.5	240312	221	335	A3	5	0
30.5"		750/60-30.5	240313	221	335	A3	10	Negative 50
30.5"	28.00x30.5	800/45-30.5	280306	221	275	A2	8	50
30.5"		800/55-30.5	280309	221	275	A2	8	Negative 100
30.5"			280312	281	335	A3	10	0
30.5"			280313	281	335	A3	10	Negative 50
32"	DW21Ax32	24.5R32	21320	281	335	A3	10	0
32"		680/70R32	21321	281	335	A4	10	Negative 50
32"		680/75R32	21326	222.25	285.75	ø21	10	40
32"	DW27Ax32	30.5L32	27320	281	335	A3	10	0
32"		800/65R32	27321	281	335	A4	10	Negative 50
32"			27334	221	275	A3	8	Negative 74
32"	DW30x32	35.5Rx32	30320	281	335	B2	10	0
32"	DW36x32	1050/50R32	36320	221	275	M26	16	28
38"	DWW30Bx38	900/60R38						
38"	DW14x38	480/70R38						
38"	DW23Ax38	710/70R38						
38"	DW25x38	800/70R38						
38"	DW28x38	900/60R38						COMING SOON...
42"	DW23Ax42	710/70R42						
42"	DW28Ax42	900/50R42						
42"	DWW30Bx42							

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

GENERAL CONDITIONS OF SALE

OFFERS

Unless otherwise stated, offers from JANTSA are valid for 30 days from the date of issue.

Offers from JANTSA are confidential and are not to be passed on to third parties.

ORDERS

Orders transmitted to JANTSA shall be written and either sent via mail, fax, or e-mail. Verbal orders will not be considered binding.

If a buyer transmits a written order to JANTSA or if JANTSA transmits a written quotation to the Buyer constituting an offer stating price, amount and terms an official order will only come into existence when the Buyer accepts JANTSA's offer by returning a signed confirmation.

Orders of any kind can neither be cancelled nor altered 14 days after their confirmation by JANTSA. Alterations will be allowed only by a revised confirmation by JANTSA which must be re-confirmed by the Buyer.

PAYMENTS

The payment of invoices must be remitted via direct deposit to the Seller's bank within the terms and conditions stated on the final official order.

Late payment will incur minimum 1% interest per month over the agreed terms of payment.

In case of claims and complaints put forth, the Buyer will not put a hold on any invoice and/or past due payments unless by prior agreement with the Seller.

CLAIMS

JANTSA will only consider claims after receiving and/or checking the defective goods or the viewing photo's of wheels (if enough to confirm) within 3 months after the complaint is lodged. Other than defects in workmanship and materials, JANTSA will not accept responsibility for any improper uses which do not conform to the specifications indicated in the catalogue.

DELIVERY TERMS

Delivery Terms will be indicated in every written contract between Buyer and JANTSA.

Delivery Terms stated in JANTSA's offers and/or acknowledgements are not guaranteed and may vary under certain circumstances. JANTSA will not be deemed responsible for any delay in delivery if caused by circumstances beyond their control including but not limited to machinery breakdown, labor problems and/or clauses of force majeure. Claims for such delays shall not entitle the Buyer to cancel their order on JANTSA or request credit from JANTSA for the delay.



www.jantsa.com

jantsa

MULTI-PIECE
HEAVY DUTY
TRUCK WHEELS

Çok Parçalı
Ağır Vasıta
Jantları

MULTI-PIECE WHEELS
AĞIR VASITA

MULTI-PIECE HEAVY DUTY TRUCK WHEELS

ÇOK PARÇALI AĞIR VASITA JANTLARI



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATı	TIRE SIZE LASTIK EBATı	JANTS A PART NUMBER JANTS A KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TİPİ	NUMBER OF BOLT HOLES BİJON SAYISI	OFFSET OFSET (mm)	LOAD CAPACITY (KG.) TAŞIMA KAPASİTESİ	SPEED (KM/H) HİZ
15"	6.0-15	750-15	60800	161	205	B2	6	122	2150	60
	6.5-15	825-15	65155	176	225	Ø26mm	10	135	2650	60
			65160	161	205	A2	6	0	2650	40
	7.0-15	900-15	70156	176	225	B3	10	142	3000	60
	7.5-15	1000-15	75155	176	225	Ø26mm	10	155	3200	60
			75161	176	225	Ø26mm	10	0	3200	40
20"	6.0-20	750-20	60250	281	335	B3	10	145	2100	100
			60252	164	222.25	B5	6	135	2100	100
			65250	221	275	B3	8	150	2300	100
	6.5-20	825-20	65255	281	335	Ø26mm	10	146	2300	100
			65262	281	335	Ø26mm	10	112.5	2600	80
			70201	221	275	B17	8	157	2200	100
	7.0-20	900-20	70204	281	335	B3	10	153	2600	100
			70214	221	275	B2	8	77	2850	60
			70218	221	*285*	B5	8	160	2600	100
			75202	281	335	Ø26mm	10	165	3100	100
7.5-20	1000-20		75207	221	*285*	B5	8	165	3050	100
			75214	281	335	Ø26mm	10	160	3000	100
			75216	281	335	A3	10	0	3100	100
			75400	281	335	Ø26mm	10	165	3100	100
			80201	281	335	Ø26mm	10	172	3250	100
8.0-20	1100-20		80202	281	335	B3	10	172	3250	100
			80207	221	275	B3	8	0	3700	40
			80221	281	335	B3	10	172	3250	100
			80231	221.5	285.75	B3	10	174	3250	100
			80233	221	285	B5	8	172	3200	100
			80400	281	335	Ø26mm	10	172	3250	100

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

MULTI-PIECE HEAVY DUTY TRUCK WHEELS

ÇOK PARÇALI AĞIR VASITA JANTLARI



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATı	TIRE SIZE LASTİK EBATı	JANTSА PART NUMBER JANTSА KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TİPİ	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFSET (mm)	LOAD CAPACITY (KG.) TAŞIMA KAPASİTESİ	SPEED (KM/H) HİZ	
20"	8.5-20	1200-20	85201	281	335	Ø26mm	10	180	3850	100	
			85202	281	335	B3	10	180	3850	100	
			85203	281	335	Ø26mm	10	172	3850	100	
			85209	221	285,75	B5	10	179	3850	100	
			85210	221	*285*	B5	8	180	3750	100	
			85214	281	335	B3	10	0	4150	40	
			85400	281	335	Ø26mm	10	180	3850	100	
	9.0-20	1200-20	90201	281	335	Ø26mm	10	141	4250	60	
	10.00-20	1400 R 20	100201	281	335	B3	10	151	4500	100	
		365/85 R 20	100204	221	275	A2	8	0	5200	40	
		395/85 R 20	100222	281	335	Ø26mm	10	214	4500	100	
22"	10.00V-20 TUBELESS	1400 R 20	100236	281	335	Ø26mm	10	Inset 120	5000	60	
		335/80 R 20	100237	281	335	Ø26mm	10	68	5050	60	
		365/80 R 20	100238	281	335	Ø26mm	10	45	5050	60	
		395/85 R 20	110214	281	335	Ø26mm	10	0	5000	80	
		8.0-22	11.00 R 22	22800	281	335	Ø26mm	10	172	3600	100
	8.0-24	1000-24TR	80241	229	286	Ø23mm	10	70	3800	100	
		1100-24	80243	321	375	A3	12	92.5	5000	40	
		1200 R 24	80244	281	335	Ø26mm	10	172	3800	100	
		1100 R 24	*85800*	281	335	B3	10	180	4500	100	
		8.5-24	1200-24	*85801*	281	335	Ø26mm	10	172	4500	100
			1200 R 24	*85802*	281	335	Ø26mm	10	180	4500	100

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.


*Marked part numbers are combined ring type (2 pcs) wheels!

RIM, RING & COMBINED RING MATCHING


2 PIECE RIM



COMBINED RING

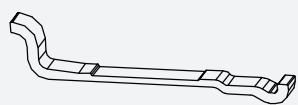

RIM BASE

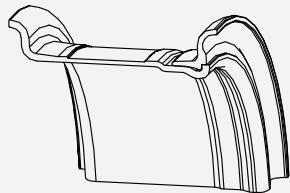

2 PIECE

RIM BASE MARKINGS

20"

Traceability Markings (7.0-8.0)

Traceability Markings (8.5)

24"

Traceability Markings (8.5)

COMBINED RING MARKINGS

Jantsa-Size-20"-CR-Year (01118)

Jantsa-Size-20"-CR-Year (01116)

Jantsa-Size-24"-CR-Year (01144)


3 PIECE RIM




SIDE RING



LOCK RING



RIM BASE

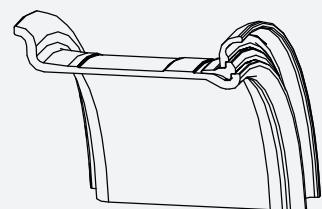

3 PIECE

NOTCHED LOCK RING MARKINGS

15"

Traceability Markings (6.0-6.5-7.0)

Traceability Markings (7.5)

Traceability Markings (8.0-8.5)

Traceability Markings (9.75)

RIM BASE MARKINGS

SIDE RING MARKINGS

LOCK RING MARKINGS

Jantsa-Size-15"-SR-Year (0828)

Jantsa-Size-15"-SR-Year (01111)

Jantsa-Size-15"-SR-Year (01112)

Jantsa-Size-15"-SR-Year (0828)

Jantsa-Size-15"-LR-Year (01607)

Jantsa-Size-15"-LR-Year (01607)

Jantsa-Size-15"-LR-Year (01607)

Jantsa-Size-15"-LR-Year (01607)

Jantsa-Size-15"-LRN-Year (01096)

Jantsa-Size-15"-LRN-Year (01096)

Jantsa-Size-15"-LRN-Year (01096)

Jantsa-Size-15"-LRN-Year (01096)

20"

Traceability Markings (6.0-6.5-7.0)

Traceability Markings (7.5)

Traceability Markings (8.0-8.5)

Traceability Markings (9.0)

Traceability Markings (10.00)

Traceability Markings (11.00)

Jantsa-Size-20"-SR-Year (01110)

Jantsa-Size-15"-SR-Year (0758)

Jantsa-Size-15"-SR-Year (01113)

Jantsa-Size-15"-SR-Year (01113)

Jantsa-Size-15"-SR-Year (01113)

Jantsa-Size-15"-SR-Year (01113)

Jantsa-Size-20"-LR-Year (0759)

Jantsa-Size-20"-LR-Year (0759)

Jantsa-Size-20"-LR-Year (0759)

Jantsa-Size-20"-LR-Year (0759)

Jantsa-Size-20"-LR-Year (0759)

Jantsa-Size-20"-LR-Year (0759)

Jantsa-Size-20"-LRN-Year (01093)

Jantsa-Size-20"-LRN-Year (01093)

Jantsa-Size-20"-LRN-Year (01093)

Jantsa-Size-20"-LRN-Year (01093)

Jantsa-Size-20"-LRN-Year (01093)

Jantsa-Size-20"-LRN-Year (01093)

22"

Traceability Markings (8.0)

Jantsa-Size-22"-SR-Year (01266)

Jantsa-Size-22"-LR-Year (01264)

24"

Traceability Markings (8.0-8.5-10.00)

Jantsa-Size-24"-SR-Year (0789)

Jantsa-Size-24"-LR-Year (01115)


Jantsa-Size-24"-LRN-Year (01065)




SIDE RING



LOCK RING

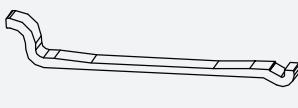

RIM BASE

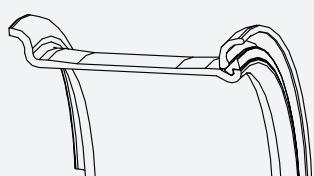

3 PIECE

RIM BASE MARKINGS

20"

Traceability Markings (10.00V-11.00V)

SIDE RING MARKINGS

Jantsa-Size-20"-SR-Year (0975)


LOCK RING MARKINGS

Jantsa-Size-20"-LR-Year (0974)


RIM, RING & COMBINED RING MATCHING




LOCK RING



SIDE RING



RIM BASE

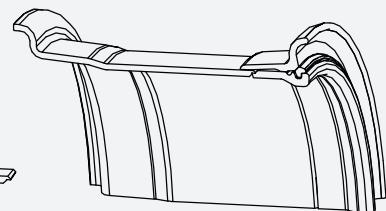

3 PIECE

20" RIM BASE MARKINGS

Traceability Markings (11.00)

SIDE RING MARKINGS

Jantsa-Size-20"-SR-Year (01204)

LOCK RING MARKINGS

Jantsa-Size-20"-LR-Year (01609)

25"

Traceability Markings (9.5)

Traceability Markings (10.00-14.00)

Traceability Markings (12.00)

Traceability Markings (17.00)

Jantsa-Size-25"-SR-Year (01179)

Jantsa-Size-25"-SR-Year (01141)

Jantsa-Size-25"-SR-Year (01224)

Jantsa-Size-25"-SR-Year (01179)


Jantsa-Size-25"-LR-Year (01608)

Jantsa-Size-25"-LR-Year (01608)

Jantsa-Size-25"-LR-Year (01608)

Jantsa-Size-25"-LR-Year (01608)

4 PIECE RIM




CONICAL RING




SIDE RING



SECURITY RING

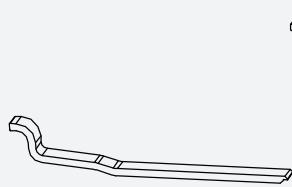

RIM BASE

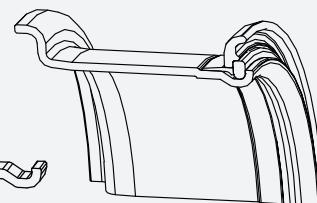

4 PIECE

15"

RIM BASE MARKINGS

Traceability Markings (8.5)

Traceability Markings (10.00)

SIDE RING MARKINGS

Jantsa-Size-24"-SR-Year (01279) (8,5)

Jantsa-Size-24"-SR-Year (01145) (10,00)

SECURITY RING MARKINGS

Jantsa-Size-24"-SR-Year (01147) (8,5)





Jantsa-Size-24"-SR-Year (01147) (10,00)

CONICAL RING MARKINGS

Jantsa-Size-24"-CR-Year (01146) (8,5)

Jantsa-Size-24"-CR-Year (01146) (10,00)

5 PIECE RIM

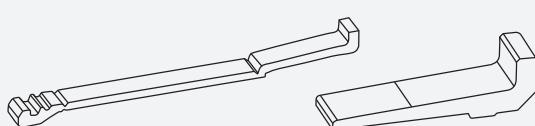

25"

RIM BASE MARKINGS

Traceability Markings
(11.25-13.25-17.00-19.5)

Traceability Markings (22.00 - 25.00)

SIDE RING MARKINGS

1828 (11.25-17.00)

1830 (11.25-13.25-17.00-19.5)

1840 (22.00-25.00)

LOCK RING MARKINGS

1830 (22.00-25.00)

BEAD SEAT MARKING

1829 (11.25-13.00-17.00-19.5)

1839 (22.00-25.00)


DRIVER KEY

1831 (11.25-13.25-17.00-19.5)

1831 (22.00-25.00)


NOTE : JANTS A SIDE RINGS & LOCK RINGS ARE NOT INTERCHANGEABLE WITH ANY OTHER BRAND.
FITTING OTHER BRAND RINGS TO JANTS A WHEEL OR RIM PRODUCT IS EXTREMELY DANGEROUS!

JANTSA PRODUCT STAMPING

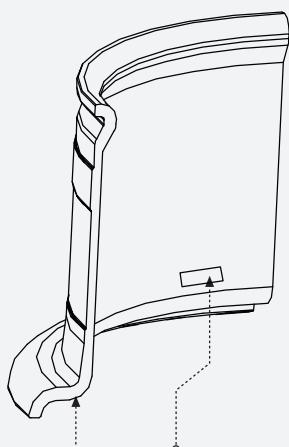


JANTSA Label/Year/Week/Day/Shift/Lot
No/Wheel Size/R
(Traceability Markings)

SIDE RING

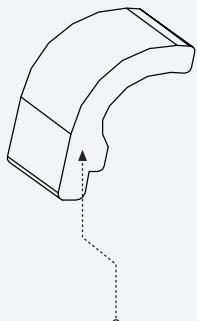


Jantsa-Size-SR-2007

LOCK RING

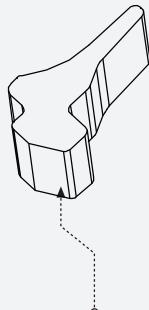


Jantsa-Size-LR-2007

COMBINED RING

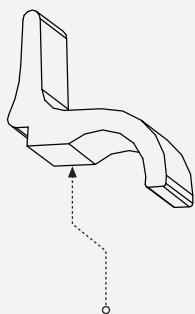


Jantsa-Size-CR-2007

CONICAL RING

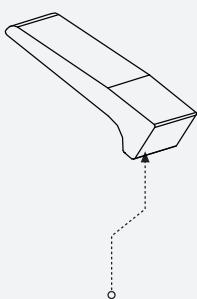


Jantsa-Size-CR-2007

LOCK RING

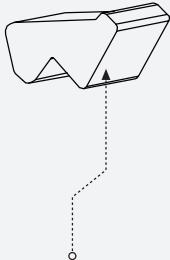


Jantsa-Size-LR-2007

SIDE RING

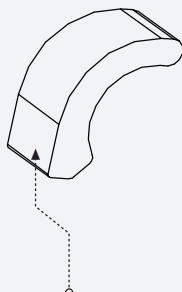


Jantsa-Size-SR-2007

LOCK RING

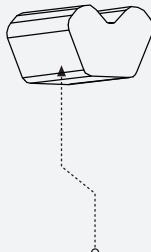

Jantsa-Size-LR-2007

SECURITY RING

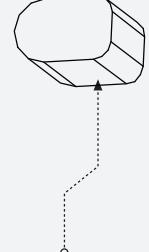

Jantsa-Size-SR-2007



www.jantsa.com

AGRO INDUSTRIAL
& INDUSTRIAL
VEHICLE WHEELS

Tarımsal Endüstriyel
ve Endüstriyel
Araç Jantları

AGRO INDUSTRIAL and INDUSTRIAL
TARİMSAL ENDÜSTRİYEL ve ENDÜSTRİYEL

AGRO INDUSTRIAL & INDUSTRIAL VEHICLE WHEELS

TARIMSAL ENDÜSTRİYEL ve ENDÜSTRİYEL ARAÇ JANTLARI



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATI	TIRE SIZE LASTIK EBATI	JANTS A PART NUMBER JANTS A KOD	CENTER HOLE PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TIPI	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFFSET (mm)
15"	5.50-15	7.00-15	15550	146	203.2	B	5	36.5
	6.5-15	825-15	65161	161	205	B2	6	134
			65162	176	225	B2	10	134
	8.0-15	1100-15	80151	178	225	B3	10	143
			80153	176	225	ø26mm	10	155
16.5"	9.75-15	12.5-15	97515	260	300	ø24mm	10	45
	10.00-15	12.5-15	10515	178	225	ø25.4mm/ø31.5/80°	5	45
	8.25X16.5 31/10.50-16.5	10,00-16.5	165825	94	140	A1	5	0
		165826	161	205	A2	6	0	
		165828	152,4	203.2	B-ø16.6/20.6/90°	8	0	
	9.75X16.5 31/11.50-16.5 36/12.50-16.5	12,00-16.5	165975	161	205	A2	6	0
		165978	152.4	203.2	B-ø16.6/20.6/90°	8	0	
		165979	221.25	275	ø19	8	-13	
20" 3PIECE	12.00X16.5 33/15.50-16.5	165121	201.6	241.3	A-ø17.5/23.8/90°	9	0	
		165122	152.4	203.2	A-ø15.8/23.5/90°	8	11	
	7.50-20 8.0-20	75239	281	335	A3	10	165	
		75262	281	335	B3	10	180	
		80226	281	335	ø26mm	10	177	
	8.5-20	80234	221	285.75	B-ø30.1/37.2/R22.2	10	172	
		80602	221	275	A3	8	0	
24"	8.5-20 10.00V-20 Tubeless	12.00R20	85222	281	335	B3	10	172
		395/80R20	85616	281	335	ø26mm	10	177
	10.00W-20	385/80R20	100225	281	335	ø26mm	10	216
		395/80R20	100230	281	335	ø26mm	12	216
	11.00-20 Tubeless	16.00R20	100271	281	335	ø26mm	10	100
		395/80R20	100278	221	275	24	8	134
			110020	350	410	ø22mm	12	47
24"	8.00TG-24 8.5-24 4pc	13.00-24	80249	228.6	285.75	ø23.8mm	10	103
			85289	371	425	ø26mm	24	172
		12.00R24	85290	281	335	ø26mm	10	200
			85291	350	400	ø24mm	16	200
	9x24 Single Piece	12.00R24	902402	282	335	ø23mm	10	50
			902412	281	335	ø26mm	10	180
	10.00-24 3pc	14.00-24	102400	281	335	ø26mm	10	0
			102401	371	425	ø26mm	12	198
			102402	371	425	ø26mm	24	198

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

AGRO INDUSTRIAL & INDUSTRIAL VEHICLE WHEELS

TARIMSAL ENDÜSTRİYEL ve ENDÜSTRİYEL ARAÇ JANTLARI



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATı	TIRE SIZE LASTİK EBATı	JANTSA PART NUMBER JANTSA KOD	CENTER HOLE PORYA ÇAPı	P.C.D. (mm) BİJON EKSEN ÇAPı	HOLE TYPE BİJON TİPİ	NUMBER OF BOLT HOLES BİJON SAYISI	OFFSET OFFSET (mm)
24"	10.00-24 4pc	14.00R24	102403	281	335	ø26mm	10	225
			102405	371	425	ø26mm	24	216
			102407	371	425	ø26mm	24	216
	W13x24	380/70-24	13241	281	335	A3	10	0
		420/70-24	13245	221	275	A2	8	-30
	W14x24	420/70-24	14241	161	205	A2	6	0
	W15Lx24	16.90-24 17.50L-24	24152	221.25	275	ø23mm	8	0
	DW16x24	19.50-24	16024	221	275	A2	8	0
24.5"	24.5x11.75	355/55-24.5	245112	201.6	241.3	A-	9	34
		24.5x13.00	24130	281	335	ø30.1/36.5/R22.2	10	0
	24.5x15.00	18-625	245152	281	335	A-	11	Negative 73
	25"	12x25	25124	290	335	A-ø22/35/R22	5	25
SINGLE PIECE			25127	221.25	275	ø23mm	8	0
13x25	15.00-25	25500	281	335	A-ø30/37/R22,2	10	-38	
25" 3 PIECE	9.5-25/1.7"	12.00-25	950025	350.2	400	A3	16	60
	10.00-25/1.5"	14.00-25 385/95R25	100025	281	335	B3	10	45
	11.25-25/1.7"	14.00-25 445/95R25	112527	281	335	ø26mm	10	0
	12.00-25/1.3"	15.5-25 395/80R25	120025	281	335	B3	10	50
	14.00-25/1.5"	17.5-25 445/80R25	140025	281	335	B3	10	50
	17.00-25/1.7"	19.5-25	170025	281	335	B3	10	50
		20.5-25	170026	371	425	A3	12	Inset 20
	36.00-25/1.5"	66x43.00-25	-	446	510	ø24mm	16	Inset 32
25" 5 PIECE	11.25-25/2"							
	13.00-25/2.5"							
	17.00-25/2"							
	17.00-25 / 3.5"							
	19.5-25/2.5"							
	22.00-25/3"							
	25.00-25 / 3.5"							
26"	W16Lx26	18.4-26	26160	290	335	A-ø21/36/R22,4	5	89
			26163	221	275	A2	8	0
28"	W14Lx28	16.9-28	14281	289.5	335	ø21,5/38/R22	10	41,7
			14284	152.4	203.2	ø21	8	Inset 30
	W15Lx28	16.9-28	28150	152.5	203.2	ø21,5/31/R18,5	-103	8

IN VARIOUS SPECIFICATIONS



We Care and Carry... Since 1977



www.jantsa.com



jantsa

SINGLE PIECE
AGRICULTURAL
WHEELS

Tarımsal Jantlar



SINGLE PIECE AGRICULTURAL WHEELS
TARİMSAL JANTLAR

SINGLE PIECE AGRICULTURAL WHEELS

TARIMSAL JANTLAR

TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATı	TIRE SIZE LASTİK EBATı	JANTS A PART NUMBER JANTS A KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TIPI	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFFSET (mm)	VEHICLE ARAÇ TIPI
12"	7.00Lx12	220/60-12	70120	110	160	A1	5	6	AGRICULTURAL MACHINERY
	4.00x15	5.00-12	40150	96	140	A-	5	0	AGRICULTURAL MACHINERY
			40112	117.5	152.4	E13	6	31	AGRICULTURAL MACHINERY
			40113	111	160	B1	5	44	AGRICULTURAL MACHINERY
	4.00x16	6.00-16	40115	115	152	Ø15mm	6	20	AGRICULTURAL MACHINERY
			40116	115	152.4	Ø14mm	6	33	AGRICULTURAL MACHINERY
			40120	161	205	A2	6	0	VARIOUS
			45102	110	140	Ø16mm/19.8/60°	5	0	VARIOUS
			45104	110	160	Ø18.5mm/22/60°	5	0	VARIOUS
			45105	110	170	Ø18.5mm/22/60°	5	0	VARIOUS
15"	4.50x16	6.00-16	45111	177.55	152.4	E16	6	45	AGRICULTURAL MACHINERY
		6.50-16	45112	161	205	A2	6	0	VARIOUS
			45118	66.6	112	A1	5	40	VARIOUS
			45128	135	175	20 / 25 / 90	5	-25	VARIOUS
		6.00/6.50-16	50101	110	160	Ø18.5mm/22/60°	5	0	VARIOUS
	5.00x16	5.00-16	50102	161	205	A2	6	0	VARIOUS
		6.50-7.00-16	50106	110	160	B1	5	28	AGRICULTURAL MACHINERY
			55102	110	160	A18	5	0	VARIOUS
			55103	161	205	A1	6	0	VARIOUS
	5.50x16	6.50/7.00-16	55104	161	205	A2	6	0	VARIOUS
16"		7.50-16	55105	117.55	152.4	E16	6	20	AGRICULTURAL MACHINERY
			55106	110	160	B1	5	28	AGRICULTURAL MACHINERY
			55107	170	220	Ø16.5mm/21/R12	6	26	AGRICULTURAL MACHINERY
			55109	115	152	Ø15mm	6	26	AGRICULTURAL MACHINERY
	6.00x16	9.00-16	16611	122	162	18mm / 25 / 90	6	-4.5	2PTS-4
			16612	145	190	20mm / 27 / 90	8	-4.5	2PTS-4
	6.50x16	9.00-16	16650	161	205	A2	6	0	AGRICULTURAL TRAILERS
			55181	161	205	B2	6	60	VARIOUS
	5.50x18	7.50-18	55183	221	275	Ø19mm	8	50	VARIOUS
	6.00x18	7.50-18	18600	90	150	Ø15.5mm	6	65	VARIOUS
18"	W9x18	280/80R18	18902	161	205	A2	6	0	VARIOUS
		320/65R18	18910	290.5	335	A-ø21.5/38/R22.4	5	18	AGRICULTURAL MACHINERY
	W11x18	340/80R18	11180	161	205	A2	6	0	AGRICULTURAL TRAILERS
			11183	221	275	A2	8	0	VARIOUS
	W13x18	15.0/70-18	13181	221	275	A2	8	0	VARIOUS
			13182	161	205	A2	6	0	AGRICULTURAL TRAILERS
19"	3.62x19	6.00-19	36219	115	152	Ø15mm	6	30	VARIOUS
	4.50x19	7.50-19	45190	117.7	152.4	Ø15mm/18mm/90°	6	55	AGRICULTURAL TRAILERS
	5.50x20	7.50-20	20551	201	245	Ø20.5mm	6	116	VARIOUS
	W8x20	280/70R20	82000	221	275	Ø19	8	60	SPRAYERS
	W9x20	280/80R20	92002	161	205	A2	6	0	VARIOUS
20"		300/70R20	92003	221	275	A2	8	0	AGRICULTURAL MACHINERY
	W10x20	12.R-20	20100	80	129	Ø19	6	10	VARIOUS
		340/80R20	20101	221	275	Ø19	8	117	VARIOUS
	W11x20	12.4R20	20112	221	275	A2	8	0	VARIOUS
			20115	161	205	A2	6	0	AGRICULTURAL TRAILERS
	W13x20	380/70R20	20134	161	205	A2	6	0	AGRICULTURAL TRAILERS
			20135	221	275	A2	8	0	VARIOUS
			20136	221	275	A3	8	Negative 75	VARIOUS
	W14x20	16/70-20	14201	221	275	A2	8	0	AGRICULTURAL TRAILERS
			14205	221	275	Ø21	8	Negative 45	VARIOUS

SINGLE PIECE AGRICULTURAL WHEELS

TARIMSAL JANTLAR



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATı	TIRE SIZE LASTIK EBATı	JANTSА PART NUMBER JANTSА KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TİPİ	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFSET (mm)	VEHICLE ARAÇ TİPi
24"	W7x24	240/85R24	72400	161	205	A2	6	66.5	VARIOUS
		240/85R24	72401	221	275	Ø19mm	8	-19	VARIOUS
	W8x24	11.00-24	24800	154	202.6	Ø17mm/22/90°	8	-37	IRRIGATION
			24802	109.5	152.4	Ø19mm	8	68	VARIOUS
	W10x24	14.00-24	24100	109.5	152.4	Ø19mm	8	68	AGRICULTURAL MACHINERY
			24111	221	275	B3	8	41	IRRIGATION
	W12x24	340/85R24	24303	109.5	152.4	Ø19mm	6	68	AGRICULTURAL MACHINERY
			24305	221	275	B3	8	62	IRRIGATION
28"	W9x28	11.2-28	28900	109.5	152.4	Ø19mm/26.9/90°	8	165	AGRICULTURAL MACHINERY
			28901	161	205	B2	6	0	
	W10x28	12.4-28	28100	161	205	B2	6	43	AGRICULTURAL MACHINERY
			28104	109.5	152.4	Ø19mm/25/90°	8	175	AGRICULTURAL MACHINERY
	W11x28	12.5-28	28110	150	200	Ø17.5mm	8	30	
	W12x28	13.6-28	28120	150.8	200	Ø17mm	8	79	AGRICULTURAL MACHINERY
			28122	190.5	152.4	Ø19mm/25/90°	8	160	AGRICULTURAL MACHINERY
30"	W13x28	14.9-28	13281	150.1	203.2	Ø19.8mm	8	83	AGRICULTURAL MACHINERY
	DW12x30	420/70 R 30	30120	101.701	165.1	Ø32.2/37/R22	6	31.5	VARIOUS
			30140	150	205	B2	8	77	AGRICULTURAL MACHINERY
		480/70 R 30	30150	152.4	203.2	19mm/26.9/90°	8	127	AGRICULTURAL MACHINERY
			30144	109.5	152.4	Ø19mm/25/90°	8	166	AGRICULTURAL MACHINERY
			30146	152.4	203.2	Ø19mm/25/90°	8	163	AGRICULTURAL MACHINERY
32"	W8x32	9.5R32	32800	161	205	B2	6	0	SPRAYERS
34"	W15Lx34	480/70 R 34 520/70 R 34	34151	152.4	203.2	Ø19mm/25/90°	6	80	VARIOUS
36"	W9x36	11.2-36	36902	190.5	152.4	Ø19mm	8	55.5	VARIOUS
			36904	150.8	200	Ø17mm	8	55.5	VARIOUS
	W11x36		36110	221	275	B3	8	30	AGRICULTURAL MACHINERY
		12.5-36	36111	152.4	203.2	B1	8	30	AGRICULTURAL MACHINERY
			36112	139.7	203.2	Ø32.3mm/37.2/R22.4	8	30	AGRICULTURAL MACHINERY
38"	DW10x38	11.2-38	10380	152.52	203.2	Ø16.6mm/20.8/90°	8	62	IRRIGATION
			10383	152.5	203.2	Ø16.6mm/20.6/90°	8	-76.5	IRRIGATION
	DW11x38		38502	221	275	B3	8	76	VARIOUS
		12.5-38	38503	152.4	203.2	B1	8	76	VARIOUS
	DW12x38	13.6-38	38504	150.8	200	Ø17mm	8	76	VARIOUS
			38120	152.4	203.2	B1	8	75	AGRICULTURAL MACHINERY
42"	DW14x38	15.50-38	38140	152.4	203.2	Ø19mm/26.9/90°	8	125	AGRICULTURAL MACHINERY
	W8x42		42800	199.5	250	24 / 28 / 90	8	135	SPRAYERS
		9.5R42. 11.2R42	42801	161	205	B2	6	95/+2	SPRAYERS
			42802	221	275	B2	8	95/+2	SPRAYERS
44"	W8x44		44801	152.4	203.2	B1	8	111.4	AGRICULTURAL MACHINERY
		9.5R44	44802	150.1	203.2	Ø19mm	8	111.4	AGRICULTURAL MACHINERY
			44804	199	250	24 / 30 / 90	8	105	SPRAYERS
52"	W8x52	300/92-52				IN VARIOUS SPECIFICATIONS			

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

**WE MAKE THE WORLD
TURN AROUND**




jantsa

www.jantsa.com



TUBELESS & TUBE TYPE
LIGHT COMMERCIAL
VEHICLE WHEELS

Kanallı ve Yarım
Kanallı 5° Eğimli
Hafif Ticari Vasıta
Jantları

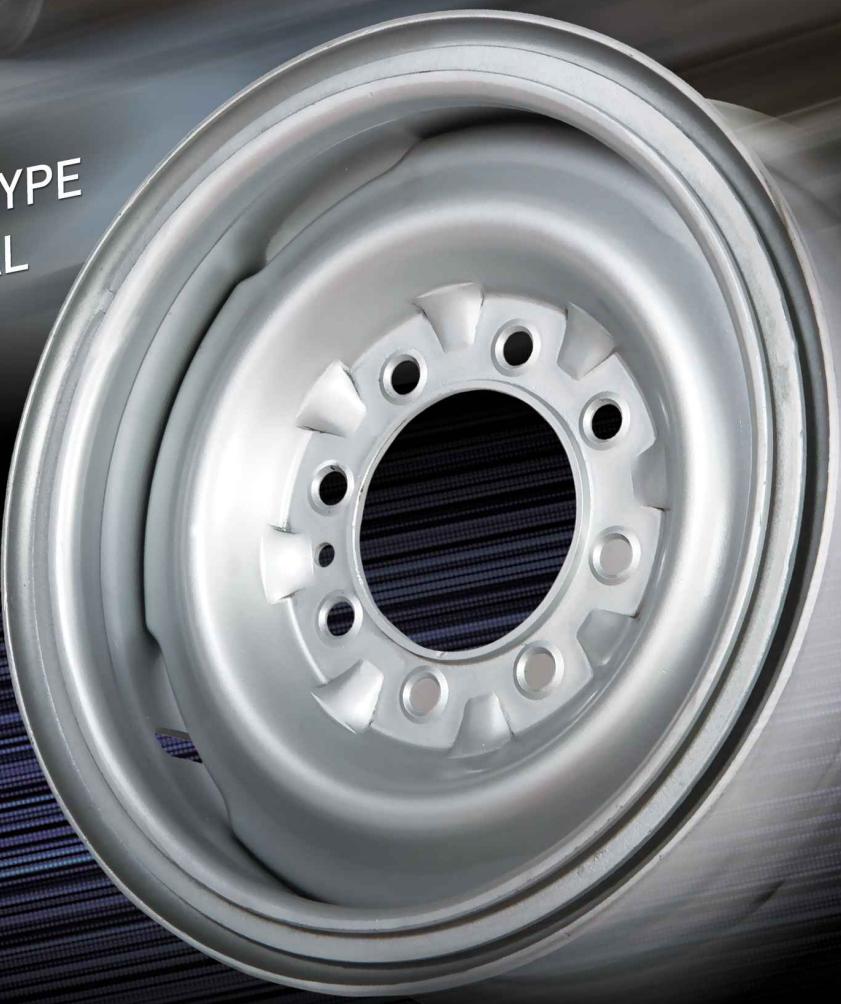

TUBELESS & TUBE TYPE LIGHT COMMERCIAL UTILITY VEHICLE WHEELS


KANALLI ve YARIM KANALLI 5° EĞİMLİ HAFIF TİCARİ VASITA JANTLARI



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATı	TIRE SIZE	JANTS A PART NUMBER JANTS A KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TIPİ	NUMBER OF BIJON HOLEs BIJON SAYISI	OFFSET OFSET (mm)	LOAD CAPACITY@ YÜKLEME KAPASITESI 100 Km/h	VEHICLE ARAÇ TIPİ
14"	5.50Jx14H2	185/70 R 14	550140	115	165	Ø13.5mm	5	Inset 38	900	BMC
			550143	130.1	170	Ø22/Ø26.8/80°	6	106	1200	VARIOUS
15"	5.50Jx15H2	185/65R15	-	58	98	B1	4	44	1000	FIAT
	6Jx15H2	185 R 15	601501	165	205	B2	6	97	1000	VARIOUS
16"	5.50Jx16H2	165 R 16	550160	130	170	Ø21.5	6	114.5	1000	GAZEL
	4,50x16	600/650-16	45109	110	140	A15	5	24	860	JEEP
			45110	71	114.3	A16	5	20.3	1050	DODGE
	5,50x16	7,50-16	55150	141	190	A-Ø20/25/R14	5	35	1100	PEUGEOT
		7.50-16	55609	117.5	152.4	A15	6	Inset 28.6	900	MASSEY
	5,50-16	7,50-16	55131	161	205	B-Ø21.5/26/R16	6	124	1320	50NC
		7,50-16	55132	161	205	B17	6	126	1320	IVECO-BMC
		7,50-16	55133	161	205	B2	6	125	1320	IVECO
		7,50-16	55134	161	205	B-Ø25.4/31/80°	6	123	1320	BEDFORD
		7,50-16	55135	161	205	B17	6	125	1320	BEDFORD
		7,50-16	55136	161	205	B-Ø21.5/26/R16	6	105	1320	MAGIRUS
		7,50-16	55137	161	205	B2	6	115	1320	MAGIRUS
		7,50-16	55138	121.5	165	A-Ø16.3/20/90°	8	Inset 14	1320	DODGE
		7,50-16	55140	161	205	B17	6	124	1320	IVECO-KOMBRING
		7,50-16	55141	121.5	165	B-Ø16.3/21.3/90°	8	Inset 14	1320	DODGE-KOMBRING
	6.00-16	7,50-16	55142	146	203.2	Ø29mm/35/r18	5	124	1320	ISUZU NPR
		7,50-16	60110	161	205	B17	6	128	1650	BEDFORD
		7,50-16	60112	146	203.2	B34	5	128	1650	ISUZU NPR
		7,50-16	60113	164	222.25	B3	6	132	1650	HINO
	6.50-16	7,50-16	60138	146	203.2	B34	5	128	1900	ISUZU
		8,25-16	65120	161	205	B17	6	123	1900	BMC

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

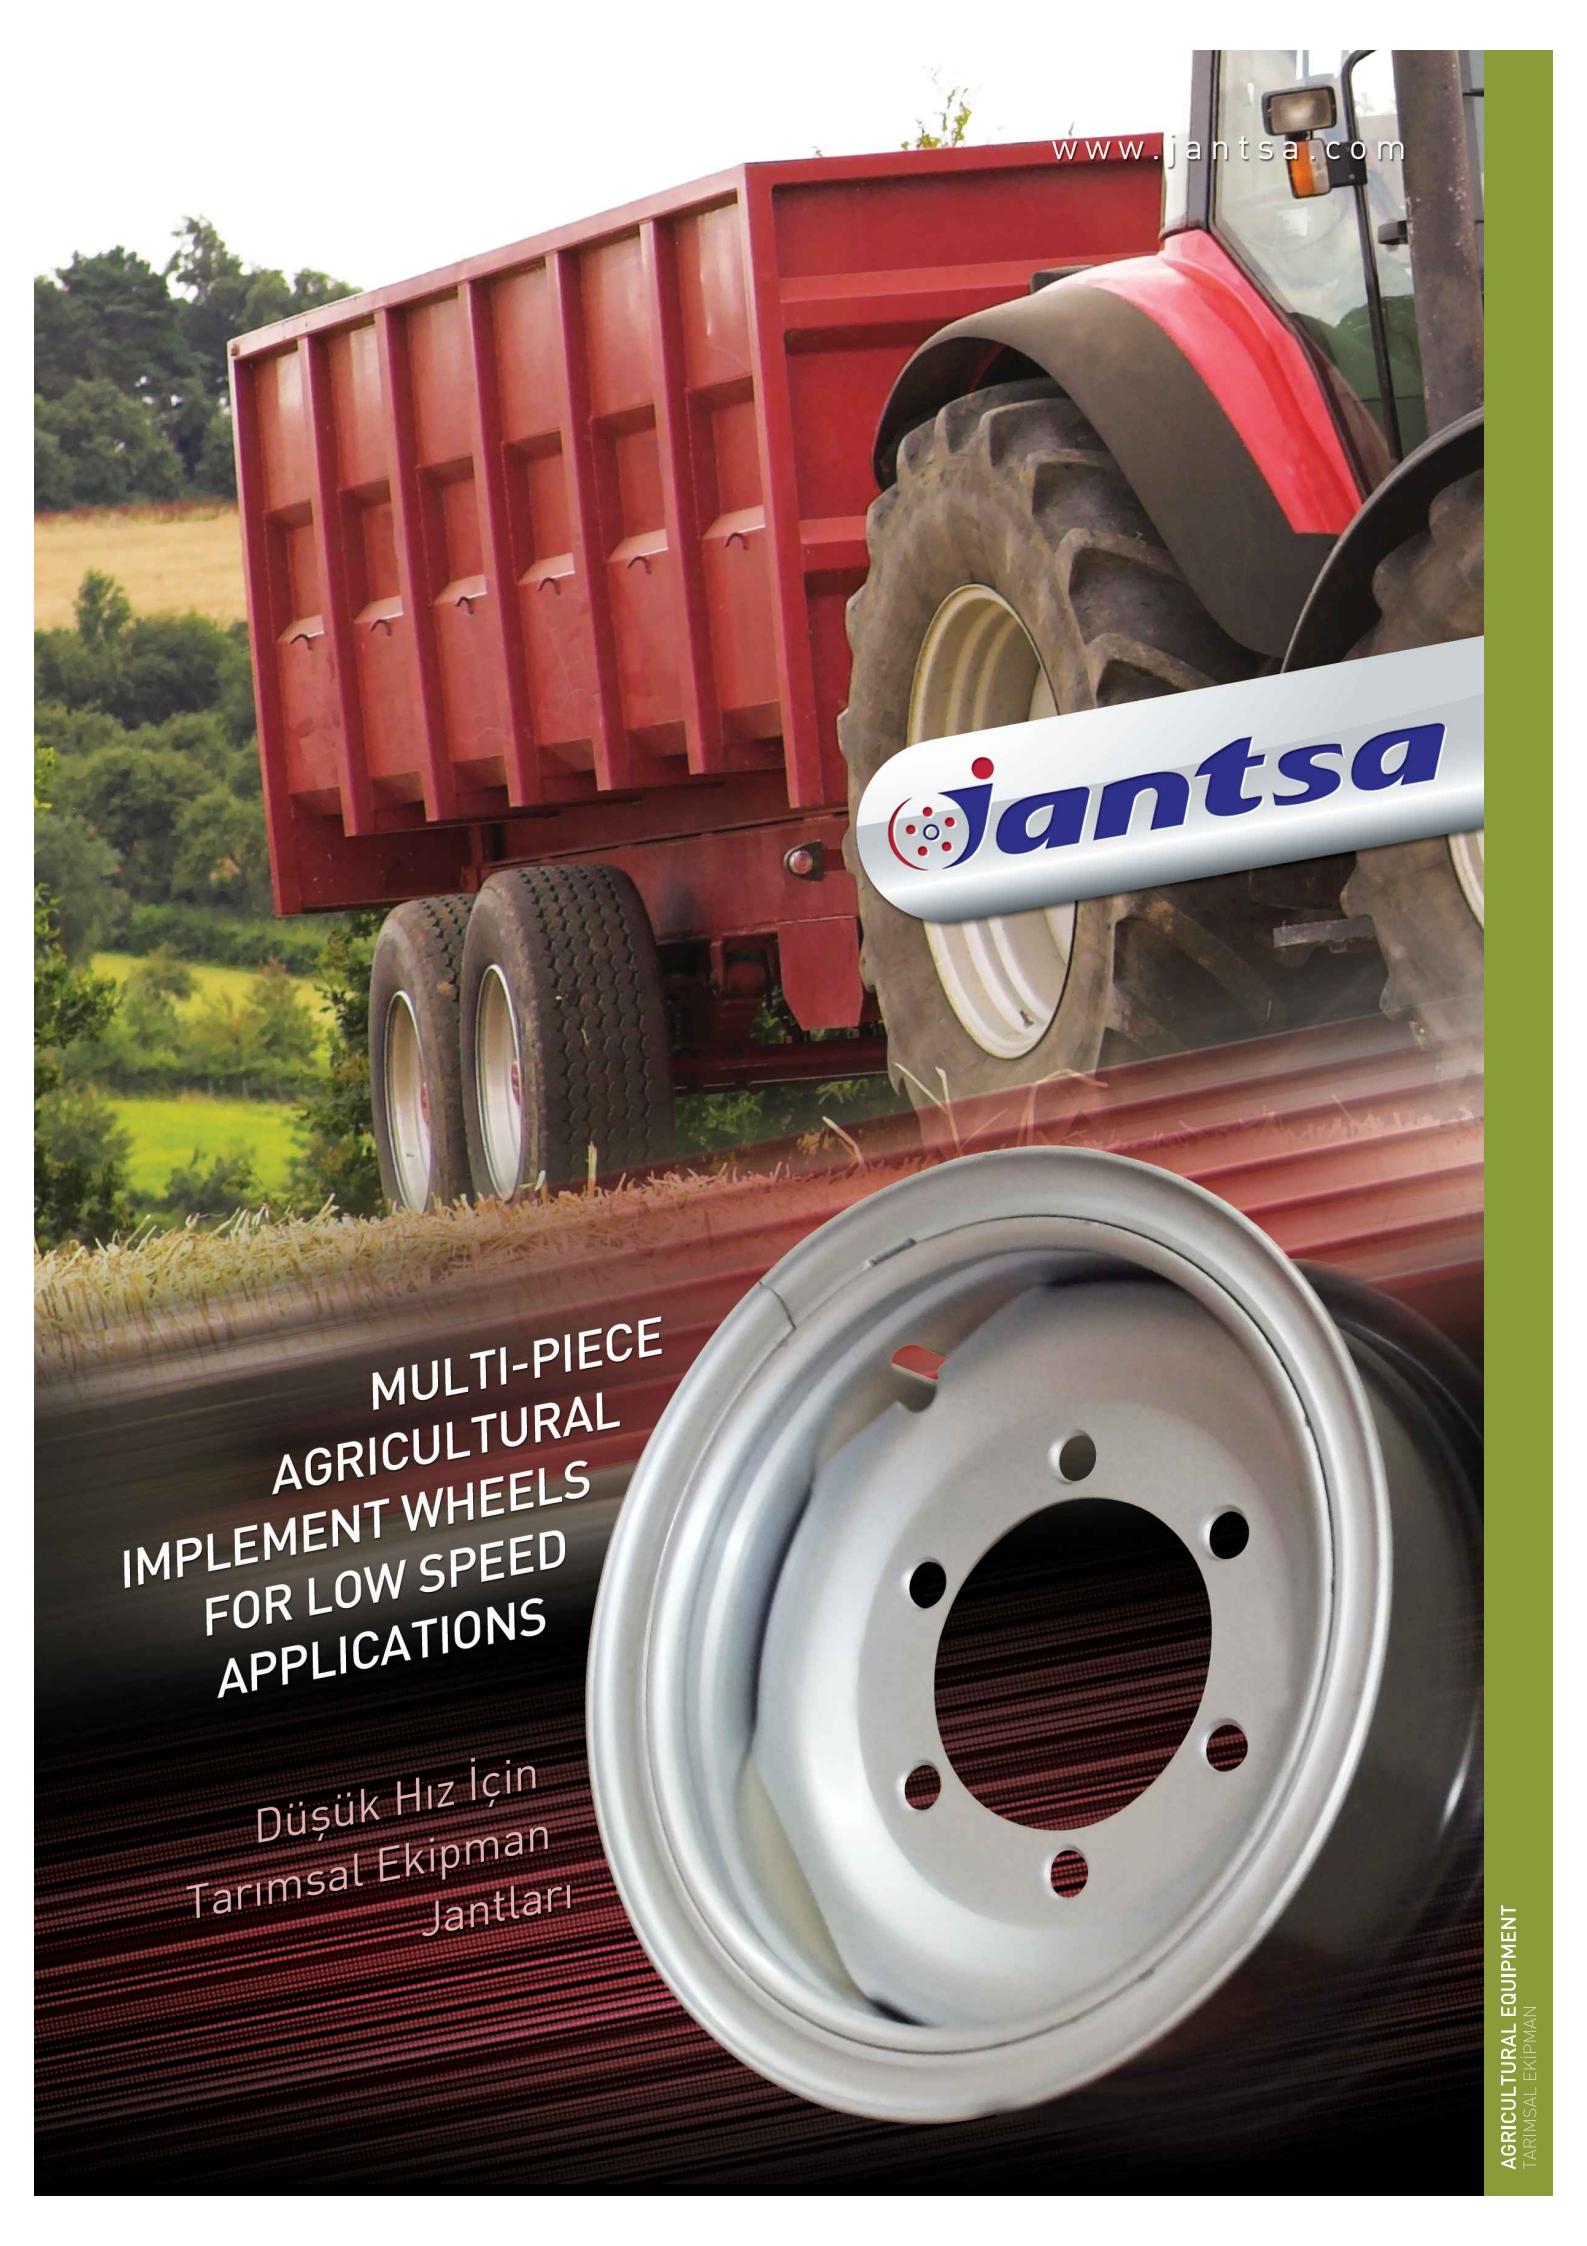

jantsa

MULTI-PIECE
AGRICULTURAL
IMPLEMENT WHEELS
FOR LOW SPEED
APPLICATIONS

Düşük Hız İçin
Tarımsal Ekipman
Jantları



MULTI-PIECE AGRICULTURAL IMPLEMENT WHEELS FOR LOW SPEED APPLICATIONS

DÜŞÜK HIZ İÇİN TARIMSAL EKİPMAN JANTLARI



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATı	TIRE SIZE LASTIK EBATı	JANTSА PART NUMBER JANTSА KOD	CENTER HOLE (mm) BİJON PORYA ÇAPı	P.C.D. (mm) BİJON EKSEN ÇAPı	HOLE TYPE BİJON TİPİ	NUMBER OF BOLT HOLES BİJON SAYISI	OFFSET OFSET (mm)	APPLICATIONS UYGULAMA
15"	6.00-15 6.50-15	8.25-15	60151	161	205	A2	6	0	AGRICULTURAL TRAILER
			65151	161	205	A2	6	0	AGRICULTURAL TRAILER
16"	5.50-16	7.50-16	55119	110	160	A1	5	0	AGRICULTURAL TRAILER
			55120	161	205	A1	6	0	AGRICULTURAL TRAILER
			55121	161	205	A2	6	0	AGRICULTURAL TRAILER
			55122	110	140	Ø16mm/19.5 /90°	5	80	AGRICULTURAL TRAILER
			55124	161	205	B2	6	118	AGRICULTURAL TRAILER
			55126	110	170	A1	5	0	AGRICULTURAL TRAILER
			60102	161	205	A2	6	0	AGRICULTURAL TRAILER
18"	6.00-16	8.25-16	60103	161	205	A2	6	0	AGRICULTURAL TRAILER
			65105	161	205	A2	6	0	AGRICULTURAL TRAILER
	6.50-16	8.25/9.00-16	18131	221	275	A2	8	0	AGRICULTURAL TRAILER

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

MULTI-PIECE AGRICULTURAL IMPLEMENT WHEELS FOR LOW SPEED APPLICATIONS

DÜŞÜK HİZ İÇİN TARIMSAL EKİPMAN JANLARI

jantsa



TECHNICAL SPECIFICATIONS / TEKNİK ÖZELLİKLER

RIM DIAMETER JANT ÇAPı	WHEEL SIZE JANT EBATı	TIRE SIZE LASTİK EBATı	JANTSА PART NUMBER JANTSА KOD	CENTER HOLE (mm) PORYA ÇAPı	P.C.D. (mm) BIJON EKSEN ÇAPı	HOLE TYPE BIJON TİPİ	NUMBER OF BOLT HOLES BIJON SAYISI	OFFSET OFFSET (mm)	APPLICATIONS UYGULAMA
20"	5.50-20	7.50-20	55202	161	205	A2	6	0	AGRICULTURAL TRAILER
			55203	161	205	A21	6	132	AGRICULTURAL TRAILER
			55204	221	275	A2	8	0	AGRICULTURAL TRAILER
			55205	221	275	A17	8	0	AGRICULTURAL TRAILER
			55206	221	275	A2	8	132	AGRICULTURAL TRAILER
	6.00-20	8.25-20	60202	161	205	A2	6	0	AGRICULTURAL TRAILER
			60203	161	205	B2	6	138	AGRICULTURAL TRAILER
			60204	221	275	A2	8	0	AGRICULTURAL TRAILER
			60205	221	275	A21	8	0	AGRICULTURAL TRAILER
			60206	221	275	B2	8	138	AGRICULTURAL TRAILER
	6.50-20	8.25/9.00-20	65201	161	205	A1	6	0	AGRICULTURAL TRAILER
			65202	161	205	A2	6	0	AGRICULTURAL TRAILER
			65203	161	205	A2	6	145	AGRICULTURAL TRAILER
			65204	221	275	A2	8	0	AGRICULTURAL TRAILER
			65207	221	275	B17	8	145	AGRICULTURAL TRAILER
	7.00-20	9.00-20	70102	161	205	A2	6	0	AGRICULTURAL TRAILER
			70103	221	275	A3	8	0	AGRICULTURAL TRAILER
	10.0-20	14-20	10201	161	205	A2	6	0	AGRICULTURAL TRAILER
			10202	221	275	A3	8	0	AGRICULTURAL TRAILER
			10203	281	335	A3	10	0	AGRICULTURAL TRAILER
	11.0-20	14-20	11201	161	205	A2	6	0	AGRICULTURAL TRAILER
			11202	221	275	A3	8	0	AGRICULTURAL TRAILER
			11203	281	335	A3	10	0	AGRICULTURAL TRAILER
	13.0-20	15.5-20	13201	161	205	A2	6	0	AGRICULTURAL TRAILER
			13202	221	275	A3	8	0	AGRICULTURAL TRAILER
			13203	281	335	A3	10	0	AGRICULTURAL TRAILER

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

WARRANTY POLICY

- JANTSA warranties that delivered goods are free from defects in materials and workmanship and are produced according to provided technical documentation.
- The Buyer should examine goods immediately upon receipt and advise Seller, in writing, of any discrepancy in terms of numbers or quality. Failure to advise Seller within 10 days would presume goods to be acceptable.
- Normal wear is not covered under warranty. The warranty also does not cover damage resulting from improper handling of products, for example overloading above the capacities specified or violating standards stipulated by ETRTO (European Tyre and Rim Technical Organization) and TRA (Tire & Rim Association) or using tires which do not correspond to both standards.
- JANTSA has no obligation under warranty for goods if they were modified, or processed (including welding of disc to rim, drilling of stud holes, mechanical processing of surface, etc.). Repair of steel wheels and their components is strictly prohibited.
- JANTSA has no obligation under warranty for goods if spare parts produced by other manufacturers are used with them.
- The onus for submitting a claim together with corroborative evidence is the sole responsibility of the Buyer. This includes: proving presence of defect itself on exact JANTSA product, the fact that defect appeared within warranty period of exact product, the fact that notification of defect was sent on time. Under request of JANTSA, the Buyer should be able provide proves that product was working according to conditions recommended by ETRTO, TRA and/or JANTSA.
- JANTSA warranties that proven defects will be corrected either through replacement of goods or through compensation of their EXW price at the moment of initial delivery of goods.
- The Buyer is obligated to store in good conditions all claimed wheels and to provide samples of defective wheels or wheels which are deemed to be claimed by the Buyer upon request from JANTSA.



Basic Wheel-Tire Matching Chart							
Wheel Size	Tire Size	Wheel Size	Tire Size	Wheel Size	Tire Size		
17.5x5.25	7 R 17.5	19.5x11.75	15 R 19.5	22.5x14.00	425/65 R 22.5		
	8 R 17.5		365/40 R 19.5		435/50 R 22.5		
	8.5 R 17.5		385/55 R 19.5		445/50 R 22.5		
	205/75 R 17.5		385/65 R 19.5		445/60 R 22.5		
17.5x6.00	8 R 17.5	19.5x14.00	18 R 19.5	22.5x15.00	445/65 R 22.5		
	8.5 R 17.5		425/55 R 19.5		455/55 R 22.5		
	9 R 17.5		435/50 R 19.5		435/45 R 22.5		
	9.5 R 17.5		445/45 R 19.5		435/50 R 22.5		
	205/65 R 17.5		445/65 R 19.5		445/50 R 22.5		
	205/75 R 17.5	22.5x7.50	10 R 22.5	6.5-15	455/40 R 22.5		
	215/75 R 17.5		11 R 22.5		455/45 R 22.5		
	225/70 R 17.5		255/70 R 22.5		455/55 R 22.5		
	225/75 R 17.5		265/60 R 22.5		8.25 R 15		
	8 R 17.5		275/70 R 22.5		7.50 R 15		
17.5x6.75	8.5 R 17.5	22.5x8.25	275/80 R 22.5	6.0-20	205/80 R 15		
	9 R 17.5		11 R 22.5		7.5 R 20		
	9.5 R 17.5		12 R 22.5		8.25 R 20		
	10 R 17.5		255/70 R 22.5		9.00 R 20		
	205/65 R 17.5		265/60 R 22.5		10.00 R 20		
	205/75 R 17.5		275/70 R 22.5	7.5-20	11.00 R 20		
	215/75 R 17.5		275/80 R 22.5		270/95 R 20		
	225/70 R 17.5		285/60 R 22.5		290/95 R 20		
	225/75 R 17.5		295/80 R 22.5		300/95 R 20		
	235/75 R 17.5		305/70 R 22.5		10.00 R 20		
	245/70 R 17.5		12 R 22.5		11.00 R 20		
19.5x6.75	8 R 19.5	22.5x9.00	13 R 22.5	8.0-20	12.00 R 20		
	9 R 19.5		285/60 R 22.5		290/95 R 20		
	9.5 R 19.5		295/60 R 22.5		300/95 R 20		
	215/75 R 19.5		295/80 R 22.5		330/95 R 20		
	235/75 R 19.5		305/60 R 22.5		11.00 R 20		
	245/70 R 19.5		305/70 R 22.5		12.00 R 20		
	265/70 R 19.5		315/60 R 22.5		300/95 R 20		
19.5x7.50	245/70 R 19.5	22.5x11.75	315/70 R 22.5	8.5-20	330/95 R 20		
	255/60 R 19.5		315/75 R 22.5		335/80 R 20		
	265/70 R 19.5		315/80 R 22.5		8.5-24		
	9.5 R 19.5		15 R 22.5		12.00 R 24		
	10 R 19.5		16.5/70 R 22.5	10.00-20	14.00 R 20		
	11 R 19.5		355/50 R 22.5	10.00V-20	335/80 R 20		
	285/70 R 19.5		365/70 R 22.5		365/80 R 20		
19.5x8.25	255/60 R 19.5		375/50 R 22.5		395/85 R 20		
	265/55 R 19.5		375/90 R 22.5		14.00 R 20		
	265/70 R 19.5		385/55 R 22.5		16.00 R 20		
	285/70 R 19.5		385/65 R 22.5		365/85 R 20		
	305/70 R 19.5		415/45 R 22.5		385/95 R 20		
	10.00W-20						
	10.00V-20						



JANTSAs does not bear any legal responsibility for any information or mis-print contained in this brochure. This brochure includes only the most commonly used tire and wheel sizes. For more detailed information please refer to information from vehicles manufacturer, international tire and rims standards or contact JANTSAs sales representatives.